Series Features

- Competitively priced, high resolution digital linear actuator
- Available with Neodymium magnet
- Linear Step Resolution - 0.0005", 0.0010", 0.0020"
- Unipolar or bipolar coil construction
- Linear force up to 128 oz (35.6N)
- 1.7 Watts input power per winding
- Fast, powerful and precise positioning
- Precision radial ball bearing design
- Industries standard frame sizes

26DBM-K Captive Version

General Specifications

Max Pull-in Rate* (Steps/Sec)	600
Power Consumption	3.4 Watts
Insulation Resistance	20 MΩ
Bearings	Radial Ball
Weight	1.2 oz (34gm)
Operating Temperature Range	-20°C - 70°C
Storage Temperature Range	-40°C - 85°C

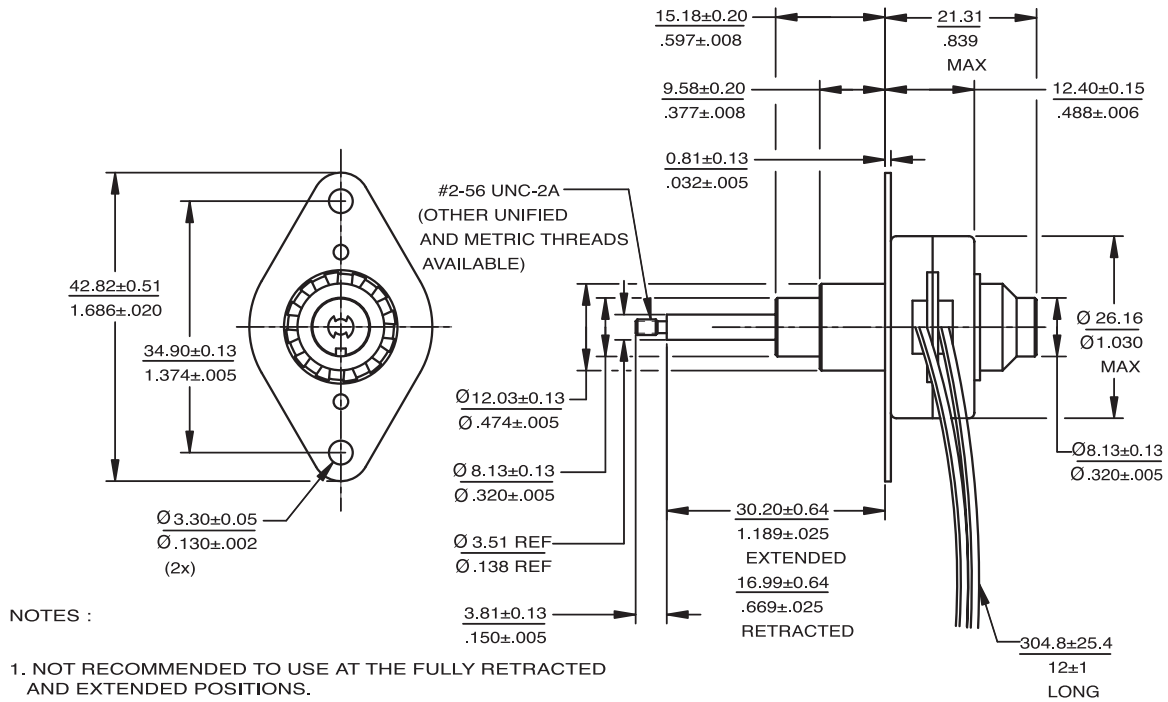

NOTES :

1. NOT RECOMMENDED TO USE AT THE FULLY RETRACTED AND EXTENDED POSITIONS.
2. SHAFT AXIAL BACKLASH : 0.15 [0.006] max

26DBM-K Captive Version

DANAHER MOTION is a trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy and reliability of the specifications in this publication. Specifications are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. It is the responsibility of the product user to determine the suitability of this product for a specific application. ©2005 Danaher Motion.